


FLUSH FIT ADAPTER (F.F.A)



MOUNTING HOLE:
WITH F.F.A: $\varnothing 124$ mm
WITHOUT F.F.A: $\varnothing 100$ mm

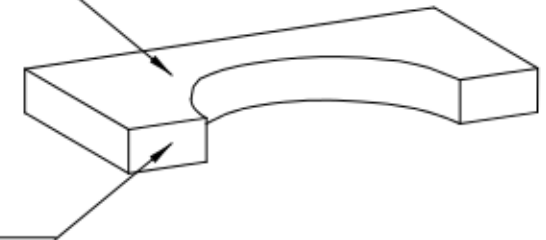

PLANE HEIGHT

WITH F.F.A: MIN: 20 mm / MAX : 55 mm
WITHOUT F.F.A: MIN: 5 mm/ MAX: 55 mm

SPECIFICHE TECNICHE:

ALIMENTAZIONE ELETTRICA:

- 2 PRESE UNEL 2P+T, 16A, 250V CON CAVO
- 1 ALIMENTATORE USB 5V-1A, DC
- 2 LED BLU

CABLAGGIO:

CAVO RIGIDO 1.5 mmq

DATA:

2 RJ45 CAT.6 CON CAVI

TECHNICAL SPECIFICS:

POWER LINE:

- 2 UNEL SOCKETS 2P+T, 16A, 250V WITH CABLE
- 1 USB POWER SUPPLY 5V-1A,DC
- 2 LED BLUE


WIRING:

RIGID CABLE 1.5 mmq

DATA:

2 RJ45 CAT.6 WITH CABLES

**SCHEMA ELETTRICO:
ELECTRIC DIAGRAM:**

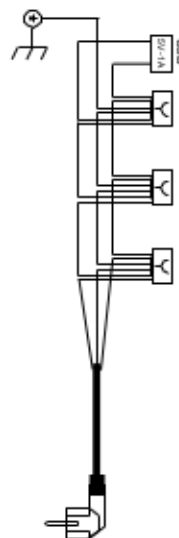

www.bpfonline.co.uk